

Milliken®

# Tire Components

## Bead and Sidewall



### High Tack Bead Wrap

Milliken's High Tack Bead Wrap is a nylon 6.6 fabric, which is RFL-treated and aqueous tackified to make it stable and ready-to-use.

The High Tack Bead Wrap is slit into tapes of different widths (minimum 17 mm) and spool lengths according to customer requirements (50 m - 100 m).




### Benefits

- Aqueous tackified
- Precision-slit tape
- Ready-to-use
- Eliminates the need for calendaring
- Strongly retains bead within the tire structure
- Reduces process waste
- Energy and cost savings


The high tack creates improved grip between bead wires and apex

### Technical Specifications

	Knitted	Woven
Weight	110 g/m <sup>2</sup>	135 g/m <sup>2</sup>
Gauge	0,45 mm	0,46 mm
Length	Up to 100m	
Standard width	17 mm	25 mm

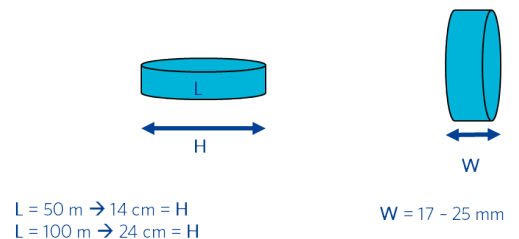

Milliken™

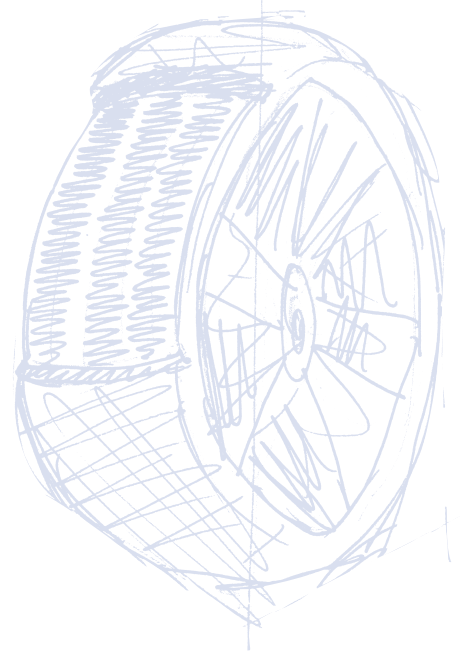

### Europe

Milliken Europe BVBA  
Ham 24  
9000 Ghent  
Belgium  
Tel: (+32) 9 265 1071  
email: [trgeurope@milliken.com](mailto:trgeurope@milliken.com)

### Asia

Milliken Asia Private Ltd.  
438B Alexandra Road#08-04  
Alexandra Techno Park Blk B  
Singapore 119968  
Tel: (+65) 65 931 335  
email: [trgasia@milliken.com](mailto:trgasia@milliken.com)

### USA

Milliken & Company  
P.O. Box 2956  
Brownwood Ave.  
LaGrange, GA 30241 USA  
Tel: (+01) 706 302 0930  
email: [trgamericas@milliken.com](mailto:trgamericas@milliken.com)

[www.milliken.com](http://www.milliken.com)

Information we provide, including without limitation, recommendations, test results, samples, care/labeling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer is responsible for its own specific use, further processing, labeling, marketing, etc. All sales are exclusively subject to our standard terms of sale posted at [www.milliken.com/terms](http://www.milliken.com/terms) unless explicitly agreed otherwise in a signed writing.

*Milliken*™